AC133 Series



Low Frequency Accelerometer, Top Exit 2 Pin Connector, 500 mV/g, ±10%






Product Features

Designed for Low-Speed Rotors, Main Bearings, and Gear Box Inputs, but Can Also be Used for High Frequency Detection

May be Used With Any Application That Requires Low and High Frequency Measurements

- ▶ 500 mV/g Sensitivity, ±10% Sensitivity
- ▶ 0.1 Hz for Low-Frequency Measurements
- ▶ 10,000 Hz for High-Frequency Detection

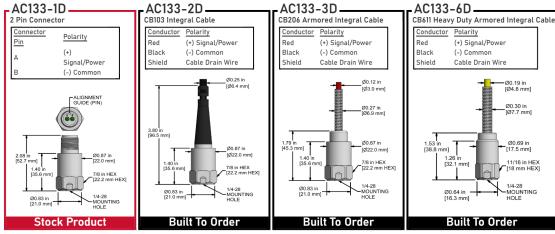

Specifications	Standard		Metric	Specifications	Standard		Metric
Part Number	AC133		M/ or M8/AC133	<u>Environmental</u>			
Sensitivity (±10%)		500 mV/g		Operating Temperature Range	-58 to 250 °F		-50 to 121 °C
Frequency Response (±3dB)	6-600,000 CPM		0,1-10000 Hz	Maximum Shock Protection		5,000 g, peak	
Frequency Response (±10%)	36-180,000 CPM		0,6-3000 Hz	Electromagnetic Sensitivity		CE	
Dynamic Range		± 16 g, peak		Sealing		Welded, Hermetic	
		*Vsource ≥ 22V, 12Vbias		Submersible Depth	200 ft.		60 m
<u>Electrical</u>				SIL Rating		SIL 2	
Settling Time		<2 Seconds		Physical			
Voltage Source		18-30 VDC		Sensing Element		PZT Ceramic	
Constant Current Excitation		2-10 mA		Sensing Structure		Shear Mode	
Spectral Noise @ 10 Hz		1.7 μg/√Hz		Weight	3.4 oz		92 grams
Spectral Noise @ 100 Hz		0.2 μg/√Hz		Case Material		316L Stainless	
Spectral Noise @ 1000 Hz		0.12 μg/√Hz		Case Material		Steel	
Output Impedance		<100 ohm		Manustina Than a d		1/4-28 Blind	
Bias Output Voltage		10-14 VDC		Mounting Thread		Tapped Hole	
Case Isolation		>10 ⁸ ohm		Connector (Non-Integral)		2 Pin MIL-C-5015	
				Resonant Frequency	1,080,000 CPM		18000 Hz
				Mounting Torque	2 to 5 ft. lbs.		2,7 to 6,8 Nm
				Manustina Handwana Cumuliad	1// 20 Child		M6x1 or M8x1.25
				Mounting Hardware Supplied	1/4-28 Stud		Adapter Stud
				Calibration Certificate		CA10	

Typical Frequency Response

